




Mulcher conceived for the maintenance of vegetable mantle, regeneration of meadows, frassland and to mulch remains of prunings.
It is a mulcher of universal use and with highest reliability.
Rotor POLSER of 550 mm of diameter for prunings up to 10 - 12 cm of diameter.
Its fixed configuration allows to position the gearbox to align the work to the axis of the tractor.

CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 10 mm.
 - ▶ Rotor POLSER of Ø 550 mm.
 - ▶ Gearbox SERRAT.
 - ▶ 3/4 XPC side belt transmission.
 - ▶ Forged agricultural hammers SERRAT.
 - ▶ Hammers guaranteed against breakage.
 - ▶ GIROSTOP System.
 - ▶ Supports of bearing rotor in steel.
 - ▶ High speed and high strength bearings.
 - ▶ Front protection curtain.
- ▶ Obturations antiwire in rotor.
 - ▶ Double bearing on rear roller.
 - ▶ Rear height-adjustable roller Ø 180 mm (210 mm from T-2000).
 - ▶ PTO 540 rpm.
 - ▶ Rear roller scraper.
 - ▶ 3 lines of counter hammers.
 - ▶ Model built under EC Normative.
 - ▶ Safety indicators visible to personnel.

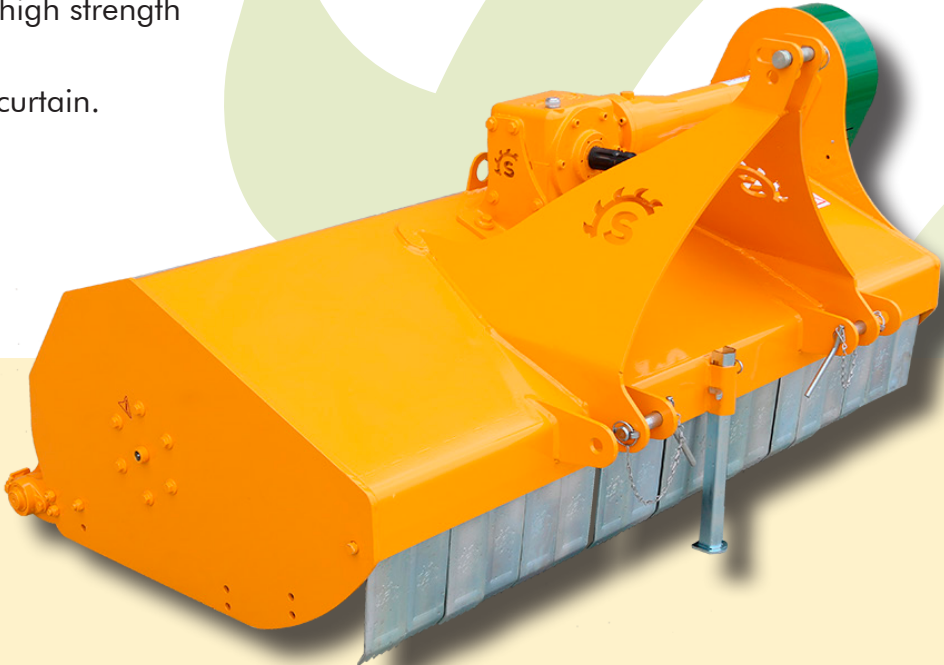

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132


Киргизия +996(312)96-26-47


<https://serrat.nt-rt.ru> || sas@nt-rt.ru

System antiwire in rotor



Rear retainer

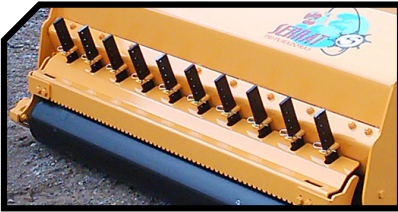

MODEL					N° BELTS TYPE							
	mm	KW-HP				A mm	A in	B mm	B in	C mm	C in	
T-1250	1250	44 - 60 96 - 130	12	618	3 XPC	1446	57"	1289	51"	948	37"	540
T-1400	1400	48 - 65 96 - 130	12	650	3 XPC	1596	63"	1289	51"	948	37"	540
T-1500	1500	51 - 70 96 - 130	12	680	3 XPC	1695	67"	1289	51"	948	37"	540
T-1600	1600	55 - 75 96 - 130	12	705	3 XPC	1796	71"	1289	51"	954	38"	540
T-1800	1800	59 - 80 96 - 130	16	770	3 XPC	1997	79"	1298	51"	954	38"	540
T-2000	2000	63 - 85 96 - 130	16	888	4 XPC	2206	87"	1344	53"	1056	42"	540
T-2300	2300	66 - 90 96 - 130	20	980	4 XPC	2506	99"	1344	53"	1106	43"	540
T-2500	2500	70 - 95 96 - 130	20	1038	4 XPC	2706	106"	1344	53"	1120	44"	1000
T-2800	2800	74 - 100 96 - 130	28	1188	4 XPC	3005	118"	1344	53"	1164	46"	1000

OPTIONS

▶ Preparation for vineyard



▶ Front skid shoes




▶ Freewheel on sleeve



▶ Front wheels



▶ Front chains

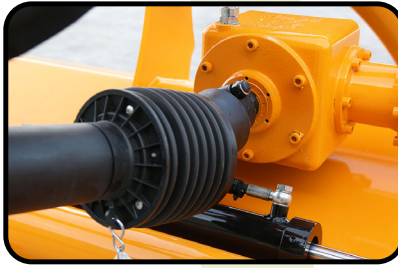

▶ Freewheel on transmission