



Offset Mulcher of high range, polyvalent, for works in agricultural margins, banks, highways, channels, roads and others clears of public works for tractor between 70 - 120 HP. It incorporates safety system thanks to a valve positioned in the cylinder of elevation of the arm. It has a rear hood with two positions. Angulation +90° / -65°. Rotor POLSER of 450 mm of diameter with hammer of high edge.

CHARACTERISTICS

- ▶ Non-wear steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER of Ø 450 mm.
- ▶ Gearbox SERRAT until 120 HP.
- ▶ 3 XPC side belt transmission.
- ▶ GIROSTOP System.
- ▶ Hammers guaranteed against breakage.
- ▶ Height-adjustable rear roller Ø 180 mm.
- ▶ PTO 750 rpm.
- ▶ High speed and high strength bearings.
- ▶ Front protection curtain.
- ▶ Front skid shoes.
- ▶ Double bearing on rear roller.
- ▶ Angulation +90°/-50°.
- ▶ Hydraulic lateral offset mulcher.
- ▶ Supports of bearing rotor in steel.
- ▶ Rear mechanical hood (2 positions).
- ▶ 3 point hitch - cat. 2 and 3.
- ▶ Safety valve.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Волгод (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://serrat.nt-rt.ru> || sas@nt-rt.ru

Hydraulic displacement



System antiwire in rotor




Angulation:
+90°

-65°

OPTIONS



▶ Homokinetic knot

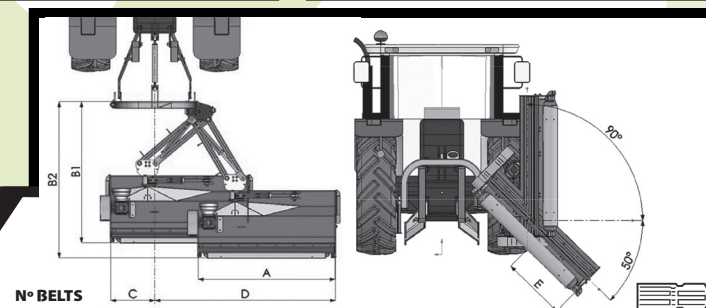

MODEL	mm	KW-HP			KG	N° BELTS TYPE	mm-in					
							A	B1	B2	C	D	
T-1600	1600	51 - 70 88 - 120	12	24	810	3 XPC	1600 - 63"	1975 - 78"	2290 - 90"	820 - 32"	2080 - 82"	750
T-1800	1800	59 - 80 88 - 120	16	28	855	3 XPC	1800 - 71"	1975 - 78"	2290 - 90"	820 - 32"	2080 - 82"	750
T-2000	2000	59 - 80 88 - 120	16	32	890	3 XPC	2000 - 79"	1975 - 78"	2290 - 90"	820 - 32"	2080 - 82"	750
T- 2300	2300	66 - 90 88 - 120	20	40	950	3 XPC	2300 - 91"	1975 - 78"	2290 - 90"	820 - 32"	2080 - 82"	750