



Offset Mulcher for works of maintenance in green areas, ways, channels, gardens and agricultural works, for tractors of 35 - 80 HP.

Angulations of work: +90° / -65° and rear hood with two interchangeable positions.

Constructed in materials of high elastic limit, to reduce its weight and to be able to work with tractors of low power.

CHARACTERISTICS

- Non-wear steel-plate chassis.
- Rotor tubular of Ø 420 mm.
- Angulation +90° / -50°.
- 3 XPB side belt transmission.
- GIROSTOP System.
- Stamped hammers SERRAT.
- Height-adjustable rear roller Ø 180 mm.
- PTO 540 rpm.
- Gearbox with freewheel included.
- Front protection curtain.
- Hydraulic lateral offset mulcher.
- Front skid shoes.
- Model built under EC Normative.
- Safety indicators visible to personnel.



Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35
Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://serrat.nt-rt.ru> || sas@nt-rt.ru

Angulation:
+90°



-65°




Freewheel on the gearbox

OPTIONS



► Homokinetic knot

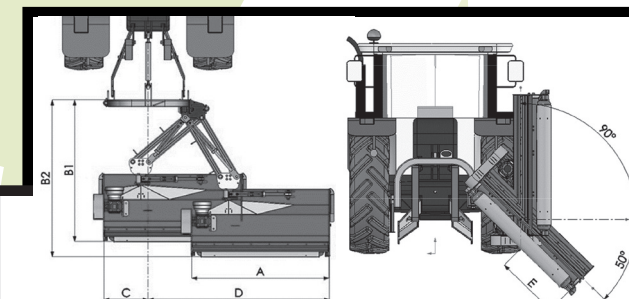

MODEL					N° BELTS TYPE	A	B1	B2	C	D	E	
	mm	KW-HP				mm-in	mm-in	mm-in	mm-in	mm-in	mm-in	
T-1400	1400	26 - 35 59 - 80	12	445	3 XPB	1400 - 55"	1645 - 65"	1820 - 72"	510 - 20"	1650 - 65"	535 - 21"	1000
T-1600	1600	34 - 45 59 - 80	16	470	3 XPB	1600 - 63"	1645 - 65"	1820 - 72"	510 - 20"	1850 - 73"	735 - 29"	1000
T-1800	1800	37 - 50 59 - 80	16	500	3 XPB	1800 - 71"	1645 - 65"	1820 - 72"	510 - 20"	2050 - 81"	935 - 37"	1000